


# Integrated solutions for small and medium size chiller/heat pumps

## Integrated solutions for small and medium size chiller/heat pumps

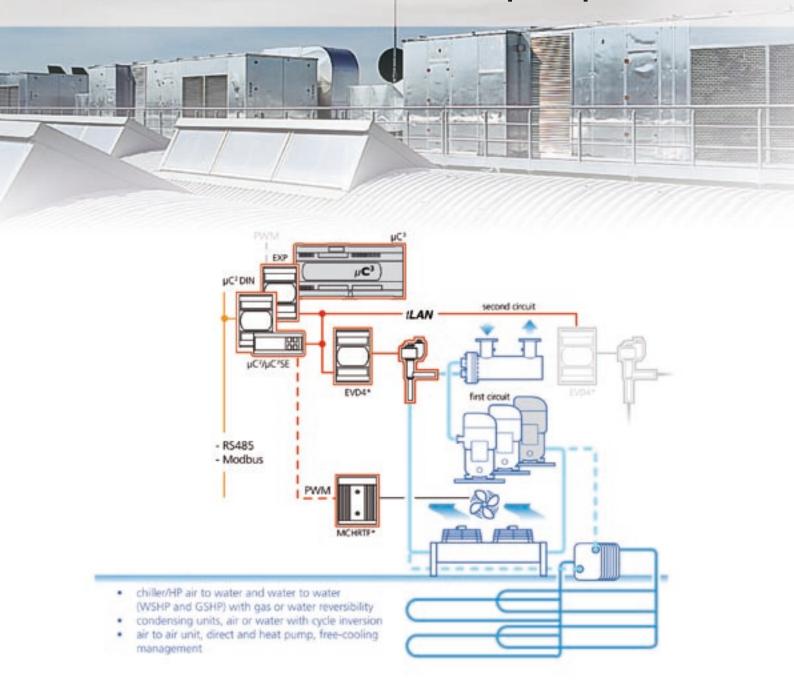

## μC sistema

This is the result of CAREL's decades' long experience in the design and production of parametric controllers for HVAC units.

 $\mu$ C sistema is made up of parametric controllers, in both the panel mounted and DIN rail versions, user interfaces, both local and remote, communication interfaces, input/output expansions and electronic expansion valve drivers. setting specific parameters, for chillers, heat pumps, and condensing units:

- water cooled
- air cooled
- up to two circuits
- up to 3 steps per circuit.

All controllers can be equipped with accessories to ensure maximum performance and energy savings, such as electronic expansion valves and ratiometric pressure transducers.

A wide range of applications can be customised by

μC sistema software functions	comfort chiller	process chiller	std/water source HP	condensing unit
Dinamic P+I control on inlet and outlet water temperature	•	٠		
Condenser/evaporator control	٠	٠	•	•
Part-winding management		•		
Solenoid valve control and pump down management	•	•		
Sliding defrost in HP mode			•	•
Antifreeze electrical heater	٠	•	•	
Electrical heater as support to compressors			•	
Control and warning of component operating hours	٠	٠	٠	٠
Unloading for high pressure in chiller mode	•	•	•	
Preventive ventilation when starting with high outside temperatures at startup	•	•		•
Stop compressors due to low outside temperature values			•	•
Unloading for low pressure (HP)			٠	•
Low noise in chiller and HP mode	•		•	
Set point variation and ON/OFF from time bands	•		٠	
Management of electronic expansion valve	•	•	•	
Event and data logging		•	٠	
Smart key - download logged data to PC		•		
Send alarms by SMS	٠		•	
Auto-tuning		•		
Self-diagnostics	٠	٠		
Automatic changeover			•	
Ground source water management			٠	٠
Smart defrost			•	•
µe-dronic	٠		٠	

## **User terminals**

The wide range of user interfaces makes interaction with  $\mu$ C sistema family controllers simple and effective, according to specific requirements.

## Communication

All the controllers, from  $\mu C^3$  to  $\mu C^2$ , are compatible with the CAREL protocol (PlantVisor) and Modbus<sup>®</sup> RTU, for third party BMS systems.

Moreover, connection to internet/intranet networks is available via the WebGATE gateway over Ethernet<sup>™</sup> 10 Mb/s.

In particular, µC<sup>3</sup> can be connected, as an alternative to RS485, to an RS232 board for managing a GSM modem and consequently exchanging SMS messages, or a LON board for connection to LonWorks<sup>™</sup> supervisory systems.

## µe-dronic

 $\mu$ AM area manager can manage one  $\mu$ C<sup>2</sup> SE controller and up to 10 e-drofan master fan coil controllers in synergy. Each master can in turn be connected to up to 5 slaves.

The µ-edronic system monitors the alarms in the installation, allows synchronised management of the fan coils, and implements energy-saving strategies according to the load measured and the temperature and humidity in the room.



μC sistema
up to 10 analogue inputs:
5 CAREL NTC,
2 x 0 to 5 Vdc ratiometric transducers,
1 x 4 to 20 mA current signal,
2 CAREL NTC or 0 to 5 Vdc ratiometric transducers, configurable via software.

#### up to 18 digital inputs:

18 voltage-free contacts (not optically-isolated)

up to 6 analogue outputs: 4 x 0 to 10 Vdc, 2 PWM

#### up to 14 digital outputs:

12 electromechanical relays, 2 electromechanical relays with changeover contacts.



**Fan speed control** up to 2–4–6–8–12 A, 230 Vac single phase or 6-9-12-20-40 A three phase 400 Vac.

**Expansion board** for second circuit with up to 15 I/O.

**Serial card** for CAREL, Modbus<sup>®</sup>, LON<sup>®</sup>, GSM messaging.



**Remote user terminal** with LCD icons for wall-mounting featuring a built-in temperature and humidity sensor.

**Service remote terminal** for panel or wall mounting with a graphic LCD.

**Local user terminal:** simple and competitive LED display.

#### Headquarters

#### CAREL S.p.A.

Via dell'Industria, 11 - 35020 Brugine - Padova (Italy) Tel. (+39) 0499 716611 - Fax (+39) 0499 716600 carel@carel.com - www.carel.com

#### **Subsidiaries**

CAREL Australia Pty Ltd www.carel.com.au sales@carel.com.au

CAREL China Ltd. www.carelhk.com info@carelhk.com

CAREL Deutschland GmbH www.carel.de info@carel.de

CAREL Export www.carel.com carelexport@carel.com

CAREL France Sas www.carelfrance.fr carelfrance@carelfrance.fr

CAREL Italia www.carel.it carelitalia@carel.com

CAREL Sud America Ltda. www.carel.com.br carelsudamerica@carel.com.br

CAREL U.K. Ltd. www.careluk.co.uk careluk@careluk.co.uk

CAREL USA L.L.C. www.carelusa.com sales@carelusa.com

#### **Affiliated Companies:**

CAREL Korea Co. Ltd. www.carel.co.kr info@carel.co.kr

CAREL (Thailand) Co. Ltd. www.carel.co.th info@carel.co.th

All trademarks hereby referenced are the property of their respective owners. CAREL is a registered trademark of CAREL S.p.A. in Italy and/or other countries.

© CAREL S.p.A. 2006 all rights reserved

CAREL reserves the right to make modifications or changes to its products without prior warning.

## www.carel.com